




LUXOMAT® IR-CdS-FP




■ TECHNICAL DATA









-  Lithium CR2032 - 3 Volt (inclusive) depending on lighting conditions
-  **clouded or dark:** 5 to 6 m;
sunshine: 2 to 3 m
-  L 80 x W 60 x H 8 mm

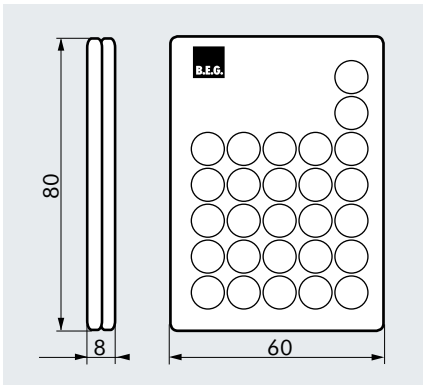 PRODUCT INFORMATION

- Using the LUXOMAT® IR-CdS-FP infrared remote control, all settings can be made comfortably from the ground without having the annoyance of setting up ladders. It is suitable for use with the LUXOMAT® CdS-FC photo electric switch.
- The great variety of programs facilitates adapting the motion detector to all individual wishes at any time – even subsequently.
- As additional feature automatically reading-in the current daylight value is optionally available with the IR-CdS-FP.
- The lights can be switched on or off anytime with just a touch of the button. That means it is not necessary to install an additional light switch.
- Comes complete with a practical wall bracket (dimensions (approx.): 63 x 29 x 19 mm).



■ PROGRAM FUNCTIONS

		Programmable Opening and closing – also with parental lock and security against sabotage after setting up		Reset - Resetting of all functions
		16 pre-set brightness values for the lighting's activation value - 20 to 2000 Lux		Permanent tamper protection - Permanent inhibition of the detector; only ON- and OFF function on the remote control possible.
		Deactivation delay - 15 sec. to 30 min.		Determination of the switch on threshold to attain a calculatory target value
		Automatic reading and saving of the actual light level		

Description	Colour	Part number
LUXOMAT® IR-CdS-FP	grey	92396