

## LUXOMAT® IR-PD-DALI




### TECHNICAL DATA

- Lithium CR2032 - 3 Volt (inclusive) depending on lighting conditions
- clouded or dark:** 5 to 6 m;
- sunshine:** 2 to 3 m
- L 80 x W 60 x H 8 mm

### PRODUCT INFORMATION

- Using the LUXOMAT® IR-PD-DALI infrared remote control, all settings at the LUXOMAT® PD2-M-DALI/DSI, PD4-M-DALI/DSI and PD9-M-DALI/DSI can be made comfortably from the ground.
- The great variety of programs facilitates adapting the motion detector to all individual wishes at any time – even subsequently.
- Additional features like automatically reading-in the current daylight value or the useful 2 sec.-test function are also optionally available with the IR-PD-DALI.
- The lights can be switched on or off anytime with just a touch of the button. That means it is not necessary to install an additional light switch.
- Comes complete with a practical wall bracket (dimensions (approx.): 63 x 29 x 19 mm).

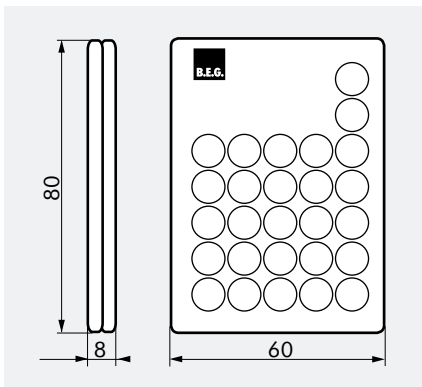

### PROGRAM FUNCTIONS

		<p>Programmable <b>Opening and closing</b> – also with parental lock and security against sabotage after setting up</p>		<p><b>Dimming</b> - The following approach will prove useful when setting a command value (example workplace): Place a luxmeter flat on the desk, then, using the remote control IR-PD-DALI, adjust the light up or down by pressing the keys max or min until the desired command value which best suits your requirements has been reached.</p>
		<p><b>Test operation</b> - The surveyed room can be paced out independent of surrounding brightness and can be aligned easily after that.</p>		<p><b>Follow-up time (Relay and Channel 1)</b> 1 upto 30 min.</p>
		<p><b>Switching between DSI and DALI program</b> - Factory setting DSI, press 1 x DALI, press 2 x DSI/DALI (Toggle-function)</p>		<p><b>Orientation lighting and its follow-up time</b> <b>OFF button:</b> No orientation light <b>Grey button:</b> Programming the switch-off delay time <b>ON button:</b> Orientation light is permanently activated.</p>
		<p><b>Luminance set point for constant light regulation</b> + / - small steps + / - big steps</p>		<p><b>Reset</b> - Resetting of all functions</p>
		<p><b>Automatic reading and saving of the actual light level</b></p>		<p><b>Fully automatic / semi automatic mode</b> - Semi automatic: green LED - Fully automatic: red LED on for approx. 3 sec.</p>

REMOTE CONTROLS

Description	Colour	Part number
LUXOMAT® IR-PD-DALI	grey	92094