



PD9-S-GH-FC

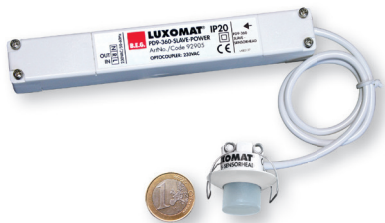

„Size comparison“




Detector

i PRODUCT INFORMATION

- Slave mini occupancy detector for high-bay applications, for extending detection area of master unit
- Trigger pulse to master when motion is detected is independent of ambient lighting
- Power unit passes through hole in ceiling for sensor
- Spring clips for quick and easy installation in suspended ceilings and light fittings
- Compatible with all Master units except: PD4-M-DS-FC, 11-48V units, PD9-M-SDB

■ TECHNICAL DATA

- 110-240 V AC , 50 / 60 Hz
- ca. 0.3W
- 360°
- max. Ø 6 m
- IP20 / Class II
- 25 °C to +50 °C
- Housing UV- and shock resistant polycarbonate
- 45 cm (screened)
- Slave**
- 230V

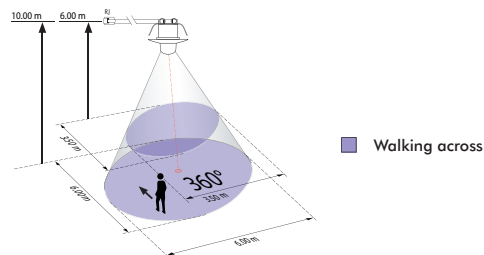

■ Walking across

Description	Colour	Part number
PD9-S-GH-FC	white	92928
Accessory (optional)		
Cover ring for PD9 (Ø 36 mm)	white/ silver/ anthracite	92238/ 92237/ 92235
Cover ring for PD9 (Ø 45 mm)	white/ silver	92327/ 92346