


### LUXOMAT® KNX SBA-4C-24 V



4C

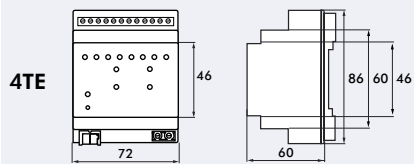

4TE

#### TECHNICAL DATA



**Supply voltage**  
230 VAC / 50 Hz



**Output voltage**  
24 VDC



**24 V DC Roller blind motors**  
200 W



Manual operation of the blind channels directly on the device



IP20



**4 TE**  
L 72 x W 60 x H 86 mm



0°C to +45°C



Plastic LEXAN UL-94-V0

#### PRODUCT INFORMATION

- The blind actuators KNX SBA-4C-24 V receive KNX telegrams and control several blind motors with limit switches independently of one another.
- Each channel is controlled with two monostable relays and can also be manually activated with the buttons at the actuator.
- Each channel can be individually programmed through the ETS3/4. Status reports, blocking functions, central switch functions and extensive calibration and positioning functions are available for selection.
- In the event of bus voltage failure or resumption, the switch positions of the relay can be individually programmed for each channel.
- The device is planned for permanent installation on a top-hat rail in high voltage current distributors.
- Installation must take place in dry interiors.

#### Description

KNX SBA-4C-24 V

#### Colour

white

#### Part number

90191

