

LUXOMAT® IR-PD4-TRIO SWI




■ TECHNICAL DATA

- Lithium CR2032 - 3 Volt (inclusive) depending on lighting conditions
- clouded or dark:** 5 to 6 m;
- sunshine:** 2 to 3 m
- L 80 x W 60 x H 8 mm

i PRODUCT INFORMATION

- Using the LUXOMAT® IR-PD4-TRIO SWI infrared remote control, all settings at the LUXOMAT® PD4-M-3C-TRIO can be made comfortably from the ground without having the annoyance of setting up ladders.
- The great variety of programs facilitates adapting the motion detector to all individual wishes at any time – even subsequently.
- Additional features like automatically reading-in the current daylight value or the useful 2 sec.-test function are also optionally available with the IR-PD4-TRIO SWI.
- The lights can be switched on or off anytime with just a touch of the button. That means it is not necessary to install an additional light switch.
- Comes complete with a practical wall bracket (dimensions (approx.): 63 x 29 x 19 mm).

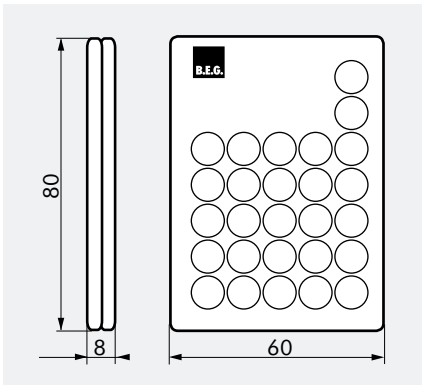

■ PROGRAM FUNCTIONS

		Programmable Opening and closing – also with parental lock and security against sabotage after setting up		Preselected switch on times for the lighting (Channel 1-3): - 5 to 90 min.
		Test operation - The surveyed room can be paced out independent of surrounding brightness and can be aligned easily after that.		Change between operation modes semiautomatic / automatic (Channel 1+2)
		Channel pre-selection - For follow-up time and brightness value calibration		Reset - Resetting of all functions
		Channel 1+2 ON/OFF Channel 3 ON/OFF		LED-Button - Activate and deactivate the walking test LED
		Target luminosity values channel 1 and 2 - 1000, 750, 500, 300, 150, 100Lux		Determination of the switch on threshold to attain a calculatory target value
		Save dimmed target luminosity value for channel 1 and 2		Permanent tamper protection - Permanent inhibition of the detector; only ON- and OFF function on the remote control possible.

Description

LUXOMAT® IR-PD4-TRIO SWI

Colour

grey

Part number

92102