


LUXOMAT® KNX SBA-4C/8C-230 V




8C



4C

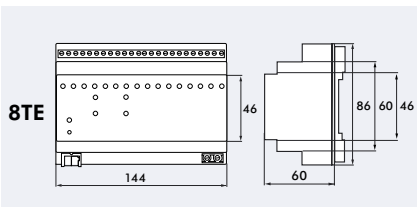

8TE

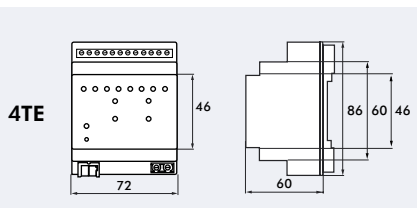

4TE

■ TECHNICAL DATA



Supply voltage
230 VAC / 50 Hz



Output voltage
230 VAC



Roller blind motors
600 W



Manual operation of the blind channels directly on the device



IP20



4 TE
L 72 x W 60 x H 86 mm

8 TE
L 144 x W 60 x H 86 mm



0°C to +45°C



Plastic LEXAN UL-94-V0

i PRODUCT INFORMATION

- The blind actuators KNX SBA-4C-230 V and KNX SBA-8C-230 V receive KNX telegrams and control several blind motors with limit switches independently of one another.
- Each channel is controlled with two monostable relays and can also be manually activated with the buttons at the actuator.
- Each channel can be individually programmed through the ETS3/4. Status reports, blocking functions, central switch functions and extensive calibration and positioning functions are available for selection.
- In the event of bus voltage failure or resumption, the switch positions of the relay can be individually programmed for each channel.
- The device is planned for permanent installation on a top-hat rail in high voltage current distributors.
- Installation must take place in dry interiors.



Description	Colour	Part number
KNX SBA-4C-230 V	white	90190
KNX SBA-8C-230 V	white	90192