



PD9-1C-GH-FC

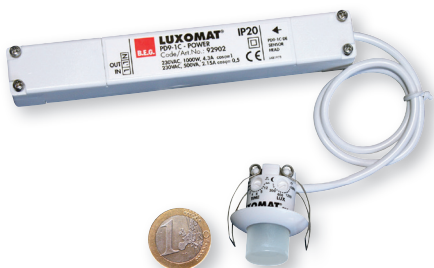

„Size comparison“


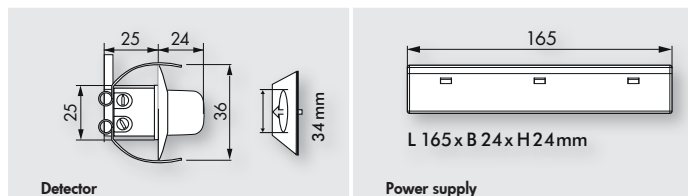


i PRODUCT INFORMATION

- Mini-motion detector designed for high-bay warehouses
- One switching channel for operating the light
- Easy installation on unit
- Power unit passes through hole in ceiling for sensor
- Spring clips for quick and easy installation in suspended ceilings and light fittings
- Includes 45mm cover ring and blinds

■ TECHNICAL DATA

- ⚡ 110-240 V AC , 50 / 60 Hz
- ⏻ ca. 0.4W
- 🌀 360°
- 📏 max. Ø 6 m
- 📦 IP20 / Class II
- 🌡️ -25 °C to +50 °C
- 🛡️ Housing UV- and shock resistant polycarbonate
- 📏 45 cm (screened)
- Channel 1 (control the lighting)**
- ⚡ 1000 W, cos φ = 1
- ⚡ 500 VA, cos φ = 0.5
- 🕒 30 s - 30 min or pulse
- 🌞 10 - 2000 Lux

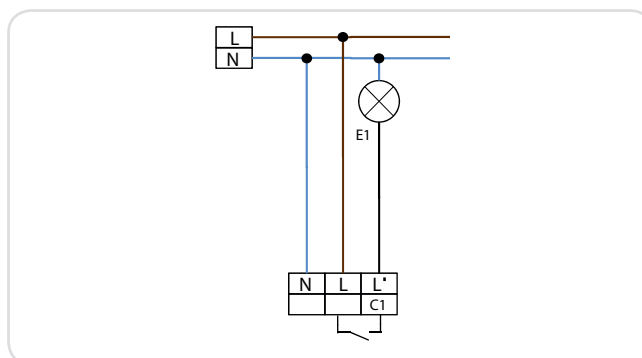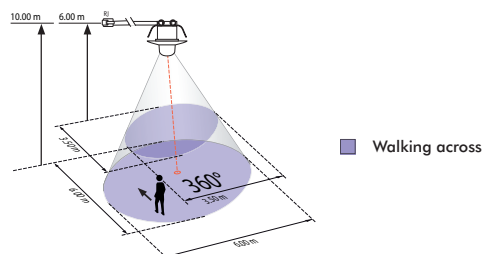

Description	Colour	Part number
PD9-1C-GH-FC	white	92934
PD9-1C-GH-FC	silver	92935
Accessory (optional)		
Cover ring for PD9 (Ø 36 mm)	white/ silver/ anthracite	92238/ 92237/ 92235
Cover ring for PD9 (Ø 45 mm)	white/ silver	92327/ 92346