


PD1N-S-SM/-FC/-FM

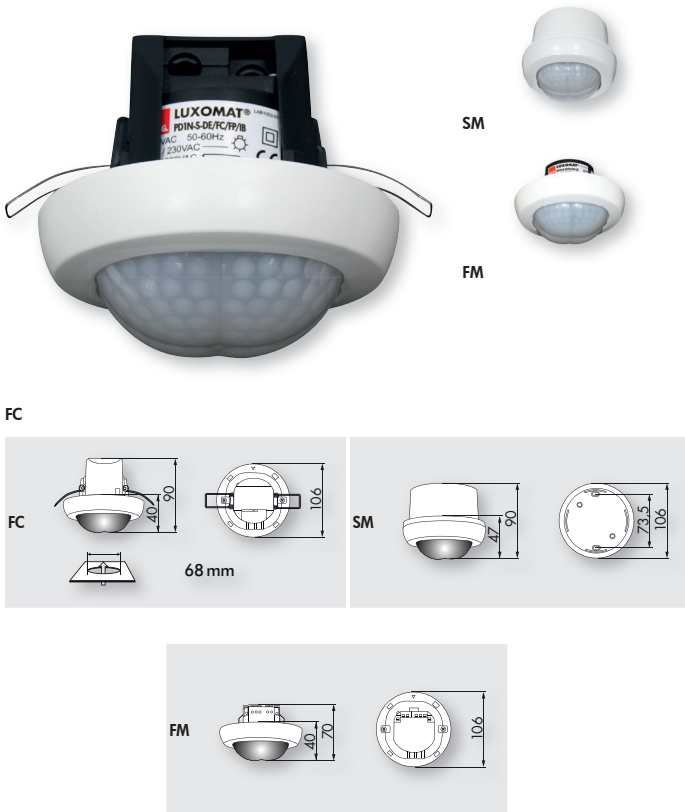


i PRODUCT INFORMATION

- Slave occupancy detector with approximately square detection area
- For extending the detection area of a Master unit
- Trigger pulse to master when motion is detected is independent of ambient lighting
- Compatible with all Master units except: PD4-M-DS-FC, 11-48V units, PD9-M-SDB

■ TECHNICAL DATA

- 110-240 V AC , 50 / 60 Hz
- ca. 0.3W
- nearly square size 4 x 90°
 Ø 7.5 m x 7.5 m across
 Ø 4.5 m x 4.5 m towards
 Ø 4.2 m x 4.2 m seated
- SM= IP54 FC= IP20 FM= IP20 / Class II
- 25 °C to +50 °C
- Housing UV- and shock resistant polycarbonate
- Pulse interval of 2 s or 9 s
- Slave**
- 230V

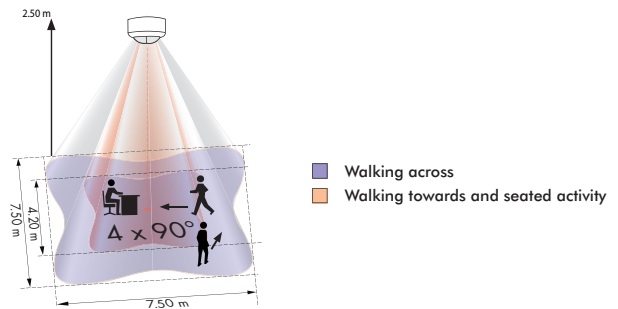

Description	Colour	Part number
PD1N-S-FC	white	92875
PD1N-S-SM	white	92878
PD1N-S-FM	white	92872
Accessory (optional)		
SM-Socket IP54 for PD1N-FM	white	92121
Wire basket BSK (Ø 200 x 100)	white	92199