


RC-plus next 280



white





i PRODUCT INFORMATION

- Motion detector with 280° detection area and 360° creep zone
- Three independent sensors with independent range adjustment
- Variable light-on time depends on direction of movement
- Adjustable ball head
- Mechanical range adjustment
- Simple socket mounting
- **Special socket included for external corner mounting**
- Wall, ceiling and external corner mounting
- Socket compatibility with **LUXOMAT®** RC-plus and **LUXOMAT®** Vario
- Immediate operation using factory settings

■ TECHNICAL DATA

- 110-240 V AC , 50 / 60 Hz
(can also be supplied with other operating voltages on request)
- 280°
- max. 20 m when walking across (tangential)
- IP54 / Class II
- 25 °C to +50 °C
- Housing UV- and shock resistant polycarbonate
- IR-RC, IR-RC-Mini, IR-RC-LD
- Channel 1 (control the lighting)**
- 3000 W, $\cos \varphi = 1$
1500 VA, $\cos \varphi = 0.5$
- 15 s - 16 min or pulse
- 2 - 2000 Lux

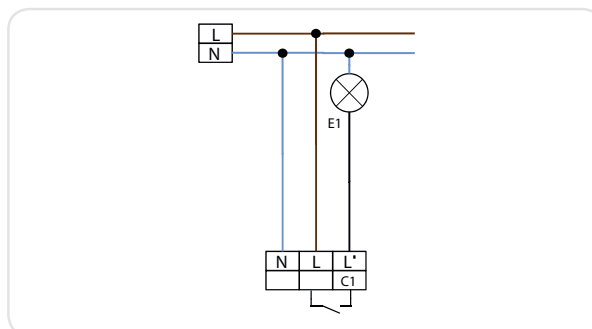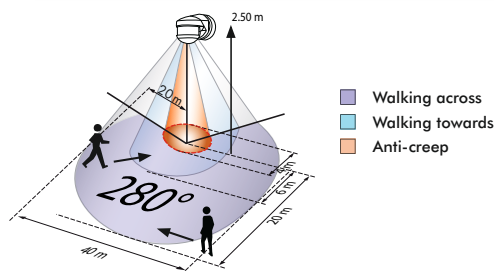

| Description | Colour | Part number |
|--|---------------------|---------------------|
| RC-plus next 280 | white | 97003 |
| RC-plus next 280 | brown | 97013 |
| RC-plus next 280 | black | 97023 |
| Accessory (optional) | | |
| IR-RC | grey | 92000 |
| IR-RC-Mini | grey | 92090 |
| IR-RC-LD | grey | 92649 |
| Outside corner socket for RC-plus next | white/ brown/ black | 97004/ 97014/ 97024 |
| Inside corner socket for RC-plus next | white | 97005 |
| Wire basket BSK (Ø 164 x 143) | white | 92467 |