


PD3N-1C-NO-PF-FC



FC
















FC

PRODUCT INFORMATION

- Remote controlled ceiling motion detector
- One dry contact
- Special optical system for detection of even the smallest movements

■ TECHNICAL DATA

-  110 - 240 V AC , 50 / 60 Hz
-  ca. 0.5W
-  360°
-  Ø 10 m across
Ø 6 m towards
Ø 4 m small movements
-  IP23 / Class II
-  -25 °C to +50 °C
-  Housing UV- and shock resistant polycarbonate
-  IR-PD3N, IR-PD-Mini
- Channel 1 (control the lighting)**
-  2300 W, $\cos \varphi = 1$
1150 VA, $\cos \varphi = 0.5$
-  30 s - 30 min or pulse
-  10 - 2000 Lux

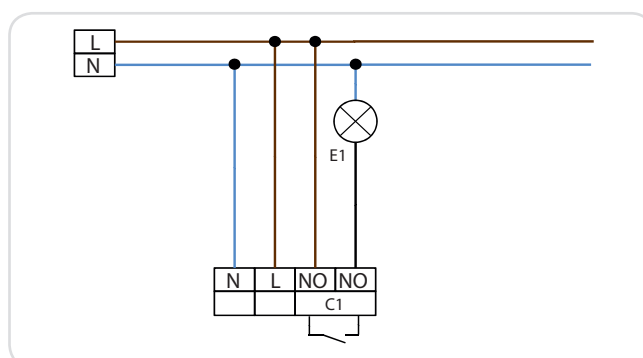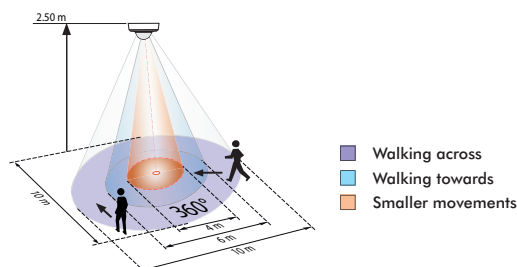

Description	Colour	Part number
PD3N-1C-NO-PF-FC	white	92576
Accessory (optional)		
IR-PD-Mini	grey	92159
IR-PD3N	grey	92105
Wire basket BSK (Ø 200 x 100)	white	92199