


PD9-M-1C-SDB-IP65-GH-FC



„Size comparison“





i PRODUCT INFORMATION

- Mini-occupancy detector designed for high-humidity locations with high ceilings
- Installation as Master
- One potential-free contact
- One switching channel for operating the light
- Spring clips for quick and easy installation in suspended ceilings and light fittings
- Includes blinds
- Additional functions can be set via optional remote control
- One additional SDB sensor can be directly connected
- Special version with spring-clamps for easy and time-saving installation into ceilings or directly built into light fittings

■ TECHNICAL DATA

- ~ 230 V AC +/- 10 %
- ☂ 360°
- ☰ max. Ø 6 m
- IP FC= IP65 / Class II
- 🌡 -25 °C to +50 °C
- 📦 Housing UV- and shock resistant polycarbonate
- 📏 350 cm (screened)
- 📡 IR-PD-Mini, IR-PD9
- Channel 1**
(control the lighting potential free)
- ⚡ 2300 W, cos φ = 1
1150 VA, cos φ = 0.5
- 🕒 15 s - 30 min
- 🌙☀ 10 - 2000 Lux

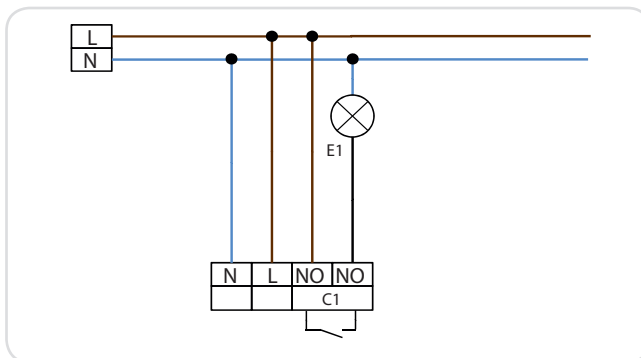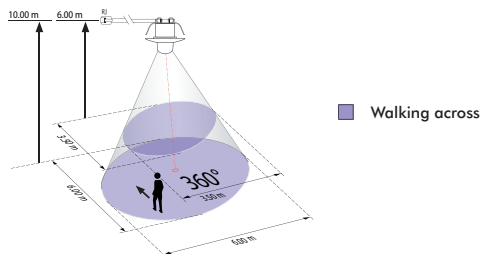

Description	Colour	Part number
PD9-M-1C-SDB-IP65-GH-FC	white	92931
PD9-M-1C-SDB-IP65-GH-FC	silver	92932
Accessory (optional)		
IR-PD9	grey	92201
IR-PD-Mini	grey	92159
PD9-S-SDB-GH-FC (Slave)	white	92933