

LUXOMAT® CdS-T-SM




TECHNICAL DATA


- 230V~ ±10%
- IP54 / Class II / CE
- L 47 x W 57 x H 65 mm
- 25°C to +50°C
- made of high-quality and UV-resistant polycarbonate
- IR-CdS-T
- Energy-saving function: "Light off"** with flexible settings (only with IR-CdS-T)
- Channel 1 (light control)**
 - 2300 W, cosφ = 1
 - 1150 W, cosφ = 0.5
- 2 - 300 Lux

PRODUCT INFORMATION

- Remotely controllable LUXOMAT® CdS-T-SM photocell with integrated timer
- Can be remotely controlled with the LUXOMAT® IR-CdS-T – infrared remote control – more functions than with a traditional control dial
- Energy-saving period may be programmed with the integrated timer by the touch of a button
- Inputting the current light value by the touch of a button
- **Application examples:** ideal for entrance areas, staircases, halls where permanent light is required

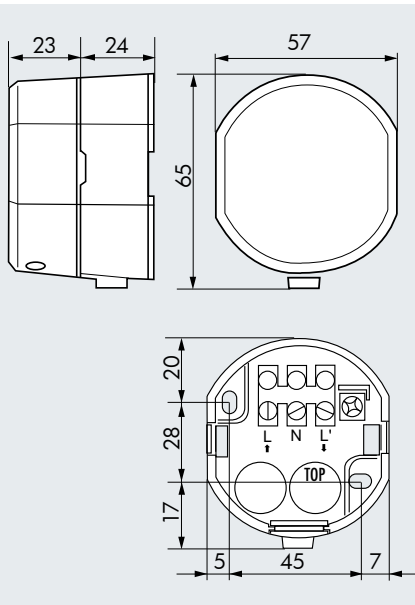

Timer function

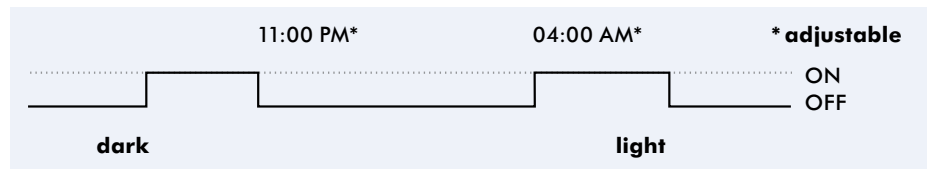

ACCESSORY (OPTIONAL)

IR-CdS-T



(to order separately)

Description	Colour	Part number
CdS-T-SM	white	92367
Accessory (optional)		
LUXOMAT® IR-CdS-T	grey	92368