


## PD11-S-FLAT-FC



FC




### **i** PRODUCT INFORMATION

- Super flat Slave occupancy detector for connection to Master unit
- For extending the detection area of a Master unit
- Trigger pulse to master when motion is detected is independent of ambient lighting
- Compatible with all Master units except: PD4-M-DS-FC, 11-48V units, PD9-M-SDB

### ■ TECHNICAL DATA

|              |                                               |
|--------------|-----------------------------------------------|
|              | 110-240 V AC , 50 / 60 Hz                     |
|              | 0.35W                                         |
|              | 360°                                          |
|              | Ø 9 m across<br>Ø 6 m towards<br>Ø 3 m seated |
|              | IP20 / Class II                               |
|              | -25 °C to +50 °C                              |
|              | Housing UV- and shock resistant polycarbonate |
| <b>Slave</b> |                                               |
|              | 230V                                          |

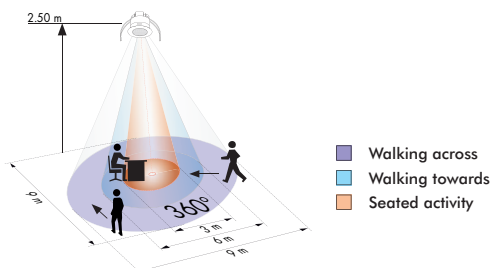

| Description    | Colour | Part number |
|----------------|--------|-------------|
| PD11-S-FLAT-FC | white  | 92593       |