


PICO-S-FC



„Size comparison“




i PRODUCT INFORMATION

- Mini occupancy detector without additional power unit for connection to master unit
- Suitable for high-humidity locations
- Trigger pulse to master when motion is detected is independent of ambient lighting
- Mounting with clip ring (included) for lights or with spring clips for suspended ceilings
- Compatible with all Master units except: PD4-M-DS-FC, 11-48V units, PD9-M-SDB

■ TECHNICAL DATA

- 110-240 V AC , 50 / 60 Hz
- ca. 0.3W
- 360°
- Ø 10 m across
- Ø 6 m towards
- Ø 4 m seated
- IP65 / Class II
- 25 °C to +50 °C
- Housing UV- and shock resistant polycarbonate
- 150 cm
- Slave**
- 230V

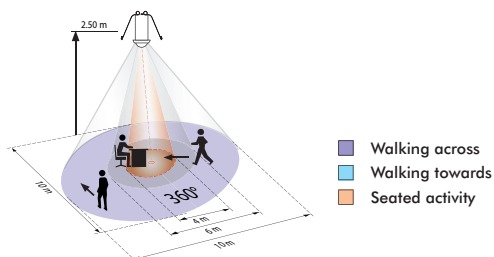

Description	Colour	Part number
PICO-S-FC	white	92700