

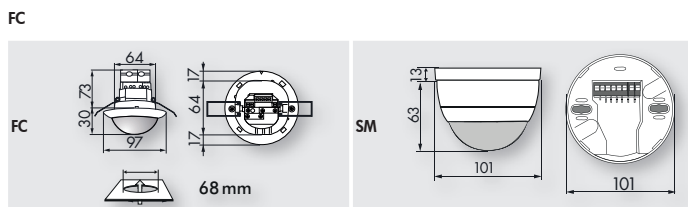


PD4-S-C-SM/-FC/-FM

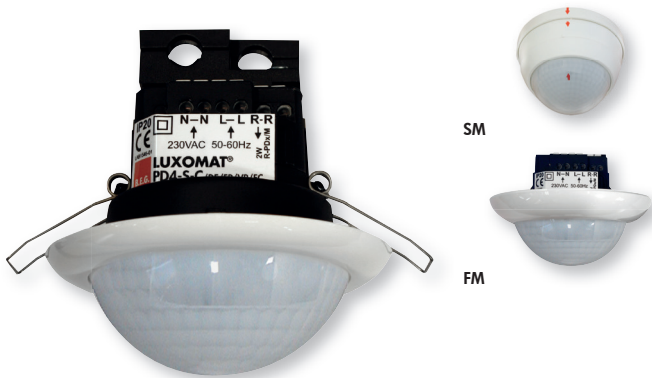


i PRODUCT INFORMATION

- Slave occupancy detector designed for corridors
- For extending the detection area of a Master unit
- Trigger pulse to master when motion is detected is independent of ambient lighting
- Compatible with all Master units except: PD4-M-DS-FC, 11-48V units, PD9-M-SDB

■ TECHNICAL DATA

- 110-240 V AC , 50 / 60 Hz
- ca. 0.2W
- 360°
- Ø 40 m across
Ø 20 m towards
- Mandatory mounting height 2,4 m - 2,6 m
- SM= IP54 FC= IP20 FM= IP20 / Class II
- 25 °C to +50 °C
- Housing UV- and shock resistant polycarbonate
- Pulse interval of 2 s or 9 s
- Slave**
- 230V

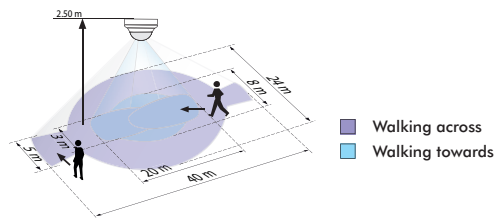

Description	Colour	Part number
PD4-S-C-FC	white	92444
PD4-S-C-SM	white	92442
PD4-S-C-FM	white	92445
Accessory (optional)		
Wire basket BSK (Ø 200 x 100)	white	92199
Wall bracket for PD4-SM	white	92441
Socket IP54 for PD2- and PD4-SM	white	92161
SM-Socket for SM-devices	white	92376