

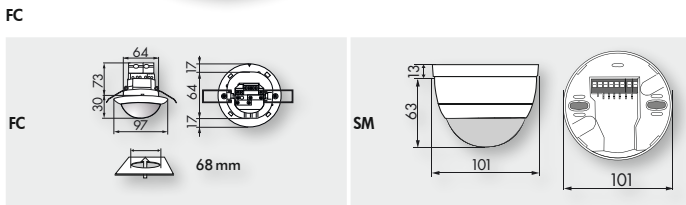


PD4-M-2C-C-SM/-FC/-FM


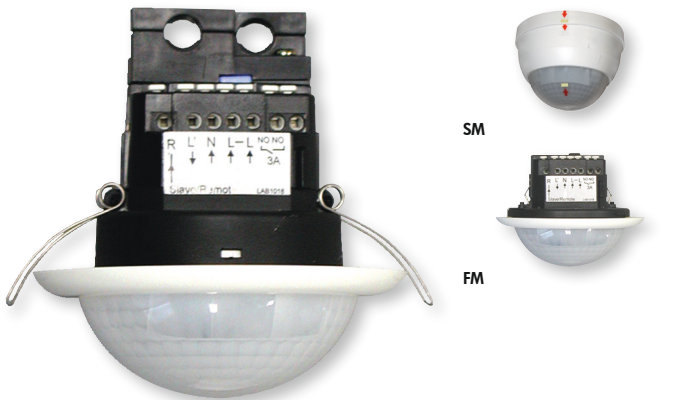


PRODUCT INFORMATION

- Occupancy detector designed for corridors
- One switching channel for operating the light
- Installation as Master
- Detection area can be extended with Slave units
- Push button manual switching available
- Alarm pulse: protected triggering only if there are three movements recognised within 9 seconds
- Additional functions can be set via optional remote control

TECHNICAL DATA

- 110-240 V AC , 50 / 60 Hz
- 360°
- Ø 40 m across
Ø 20 m towards
- Mandatory mounting height
2.4 m - 2.6 m
- SM= IP54 FC= IP20 FM= IP20 / Class II
- 25 °C to +50 °C
- Housing UV- and shock resistant polycarbonate
- IR-PD-2C, IR-PD-Mini
- Channel 1 (control the lighting)**
- 2300 W, $\cos \varphi = 1$
1150 VA, $\cos \varphi = 0.5$
- 15 s - 30 min or pulse
- 10 - 2000 Lux
- Channel 2 (control HVAC potential free)**
- Dry contact type NO 3A, 230 V, $\cos \varphi = 1$
- Alarm pulse, pulse or 5 - 120 min

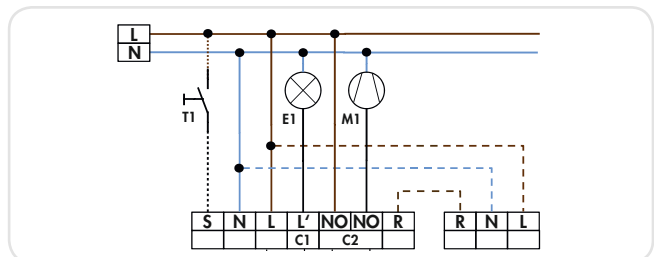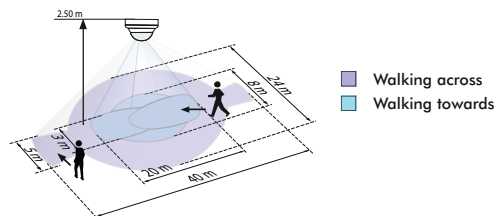

Description	Colour	Part number
PD4-M-2C-C-FC	white	92143
PD4-M-2C-C-SM	white	92440
PD4-M-2C-C-FM	white	92443
Accessory (optional)		
IR-PD-2C	grey	92475
IR-PD-Mini	grey	92159
Wire basket BSK (Ø 200 x 100)	white	92199
Wall bracket for PD4-SM	white	92441
SM-Socket for SM-devices	white	92376