


LUXOMAT® KNXnet/IP Interface Web

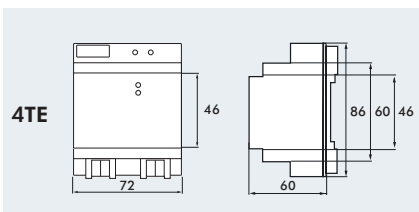

FUNCTIONAL OVERVIEW

Function	
Primary functions	✓
Visualisation	✓
Database and alarm history	
Scenes	
Weekly time switching plan	
Annual time switching plan	
Logic	

TECHNICAL DATA

- External and via KNX BUS, SELV 12-30V AC/DC
- LED red** when displaying normal/addressing mode
- PWR-LED green** when displaying operational readiness (blinks when operating normally)
- ERR-LED red** when displaying error conditions
- Learn key for switching normal/addressing mode
- IP20 / Class I
- 4 TE**
L 72 x W 60 x H 86 mm
- Operation**
0°C to +45°C
- Storage**
-25°C to +70°C
- Plastic LEXAN UL-94-V0

PRODUCT INFORMATION

- Websites can be called up from the integrated web server via the TCP/IP network in order to switch KNX statuses or events.
- Controllable via Smartphone or PDA
- Programming interfaces from the ETS to the KNX BUS
- Scan function (ETS3 and 4)
- KNXnet/IP tunnel connection
- 4TE plastic top-hat rail housing
- Programmable via ETS3 and 4
- Connection: 12-30V AC/DC, network and KNX
- Pre-installed visualisation software
- Integrated web server



Description	Colour	Part number
KNXnet/IP Interface Web	white	90126