




LUXOMAT® IR-PD-DIM-Mini




TECHNICAL DATA

-  Lithium CR2032 - 3 Volt (inclusive) depending on lighting conditions
-  **clouded or dark:** 5 to 6 m;
sunshine: 2 to 3 m
-  L57 x W35 x H7 mm

PRODUCT INFORMATION

- Infrared remote control **LUXOMAT® IR-PD-DIM-Mini** for end user is applicable for the following detectors: **LUXOMAT® PD1-M-DIM, PD2-M-DIM, PD4-M-DIM, PD4-M-DUO-DIM, PD5-M-DIM and PD9-M-DIM.**
- Constant light can be switched on and off easily without any ladder. The installation of an additional switch is not necessary.
- Received infrared signals will be received by blinking of a LED and by switching of the relay.

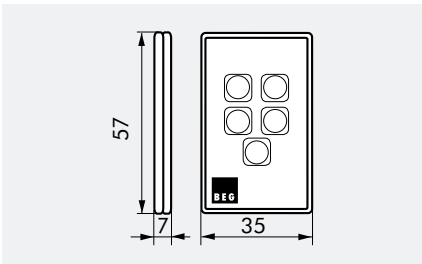

PROGRAM FUNCTIONS

		Automatic reading and saving of the actual light level		RESET function - Stops PARTY program and immediately switches to the ready mode. Used to deactivate the continuous light OFF option during the selftest phase.
		Dim buttons for constant light control: - Temporary or permanent modification of the constant light level		Switching on and off of the light - The light can be switched on and off via the remote control at any time. In addition, the switch allows changes between automatic and semiautomatic operating modes.

REMOTE CONTROLS

Description	Colour	Part number
LUXOMAT® IR-PD-DIM-Mini	grey	92098