
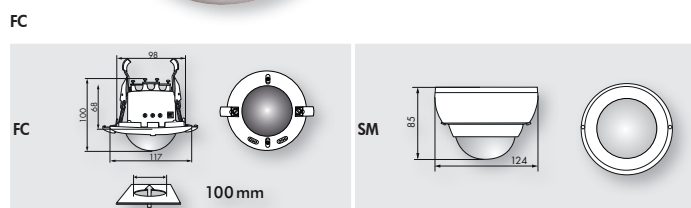


PD4-M-3C-TRIO-SM/-FC


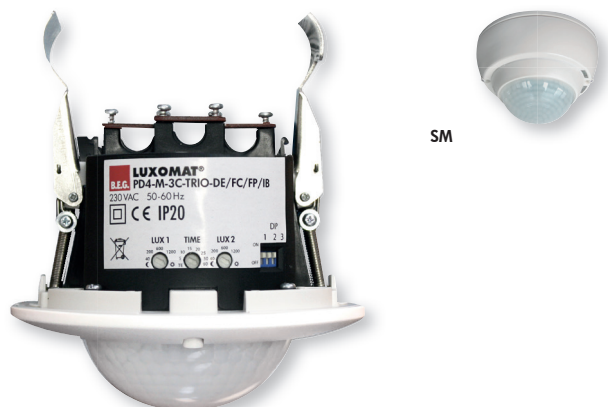


i PRODUCT INFORMATION

- Occupancy detector particularly for classrooms and training classrooms
- Two dry contacts for groups of lights
- One contact for blackboard illumination
- One common detection area
- Two independent, movable light sensors
- Two push button manual switching available
- Installation as Master
- Detection area can be extended with Slave units
- Additional functions can be set via optional remote control

■ TECHNICAL DATA

- ⚡ 110-240 V AC , 50 / 60 Hz
- ⏻ ca. 0.5W
- ☂ 360°
- ⊘ 24 m across
- ⊘ 8 m towards
- ⊘ 6,4 m seated
- IP □ SM= IP20 FC= IP20 / Class II
- 🌡 -25 °C to +50 °C
- 📦 Housing UV- and shock resistant polycarbonate
- 📶 IR-PD4-TRIO SWI
- Channel 1 to Channel 3 (control the lighting)**
- ⚡ 3000 W, cos φ = 1
- ⚡ 1500 VA, cos φ = 0.5
- 🕒 1 - 90 min
- 🌙☀ 10 - 2000 Lux

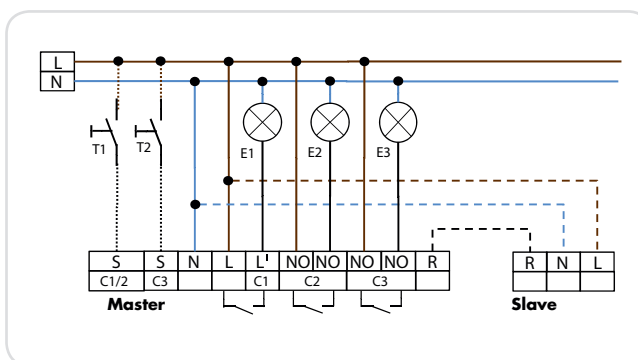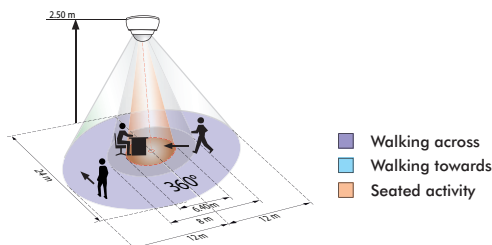

Description	Colour	Part number
PD4-M-3C-TRIO-FC	white	92745
PD4-M-3C-TRIO-SM	white	92740
Accessory (optional)		
IR-PD4-TRIO SWI	grey	92102
Wire basket BSK (∅ 200 x 100)	white	92199
Wire basket BSK (∅ 164 x 143)	white	92467
Socket IP54 for PD4-TRIO-SM	white	92386