


RC-plus next 230



white





i PRODUCT INFORMATION

- Motion detector with 230° detection area and 360° creep zone
- Two independent sensors with independent range adjustment
- Variable light-on time depends on direction of movement
- Adjustable ball head
- Mechanical range adjustment
- Simple socket mounting
- Wall, ceiling and external corner mounting
- Socket compatibility with **LUXOMAT®** RC-plus and **LUXOMAT®** Vario
- Immediate operation using factory settings

■ TECHNICAL DATA

- ~ 110-240 V AC , 50 / 60 Hz
(can also be supplied with other operating voltages on request)
- ☂ 230°
- 📏 max. 20 m when walking across (tangential)
- IP IP54 / Class II
- 🌡 -25 °C to +50 °C
- 🛡 Housing UV- and shock resistant polycarbonate
- 📡 IR-RC, IR-RC-Mini, IR-RC-LD
- Channel 1 (control the lighting)**
- 💡 3000 W, $\cos \varphi = 1$
1500 VA, $\cos \varphi = 0.5$
- 🕒 15 s - 16 min or pulse
- 🌙☀ 2 - 2000 Lux

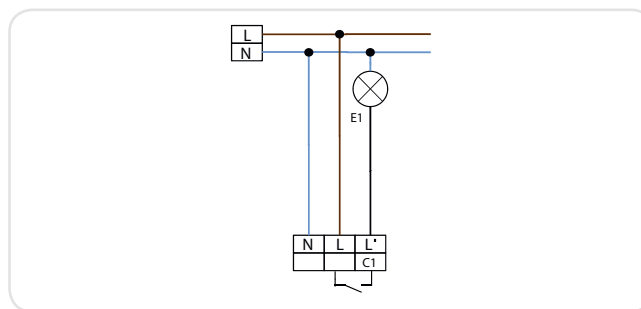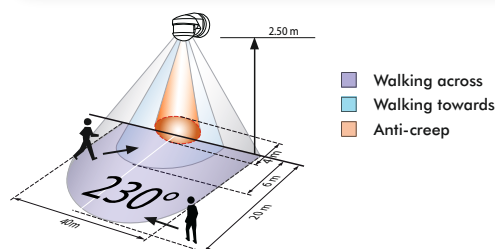

Description	Colour	Part number
RC-plus next 230	white	97002
RC-plus next 230	brown	97012
RC-plus next 230	black	97022
RC-plus next 230	silver	97042
Accessory (optional)		
IR-RC	grey	92000
IR-RC-Mini	grey	92090
IR-RC-LD	grey	92649
Outside corner socket for RC-plus next	white/ brown/ black/ silver	97004/ 97014/ 97024/ 97043
Inside corner socket for RC-plus next	white	97005
Wire basket BSK (Ø 164 x 143)	white	92467