


## RC-plus next 130



white





### **i** PRODUCT INFORMATION

- Motion detector with 130° detection area and 360° creep zone
- Variable light-on time depends on direction of movement
- Adjustable ball head
- Mechanical range adjustment
- Simple socket mounting
- Wall, ceiling and external corner mounting
- Socket compatibility with **LUXOMAT®** RC-plus and **LUXOMAT®** Vario
- Immediate operation using factory settings

### ■ TECHNICAL DATA

- 110-240 V AC , 50 / 60 Hz  
(can also be supplied with other operating voltages on request)
- 130°
- max. 20 m when walking across (tangential)
- IP54 / Class II
- 25 °C to +50 °C
- Housing UV- and shock resistant polycarbonate
- IR-RC, IR-RC-Mini, IR-RC-LD
- Channel 1 (control the lighting)**
- 3000 W,  $\cos \varphi = 1$   
1500 VA,  $\cos \varphi = 0.5$
- 15 s - 16 min or pulse
- 2 - 2000 Lux

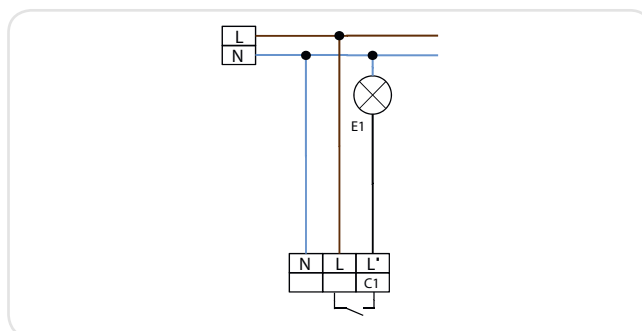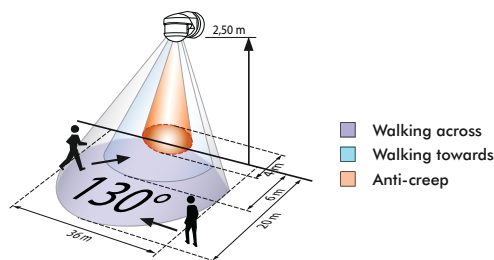

Description	Colour	Part number
RC-plus next 130	white	97001
RC-plus next 130	brown	97011
RC-plus next 130	black	97021
<b>Accessory (optional)</b>		
IR-RC	grey	92000
IR-RC-Mini	grey	92090
IR-RC-LD	grey	92649
Outside corner socket for RC-plus next	white/ brown/ black	97004/ 97014/ 97024
Inside corner socket for RC-plus next	white	97005
Wire basket BSK (Ø 164 x 143)	white	92467